

Nameer Hashim Qasim

Al-Rafidain University, Baghdad, Iraq

## LEVERAGING LTE TECHNOLOGY FOR ADVANCEMENTS IN DISTRIBUTED COMPUTING AND IOT SYSTEMS

**Abstract.** Long-Term Evolution (LTE) technology is largely used in distributed computing and IoT in providing low latency, reliable and high bandwidth transmission. This paper discusses the LTE adoption in distributed computing environment and the IoT solution space with a special consideration to its performance in the areas of latency, scalability and energy consumption. The study assesses the efficacy of LTE for IoT under a range of network conditions using a mixed method approach of theorization, simulations, and case studies on IoT applications in smart cities, manufacturing, and health. At the same time, it analytically proves that LTE decreases latency times by 40% to the first legacy systems, increases the reliability of data transmission and allows for the construction of horizontally scalable IoT networks. In addition, owing to its adaptive modulation, the energy efficiency in dense IoT environment is improved by 25%. This article provides a detailed description of LTE's application in improving IoT systems and further recommends the study of coexistence of LTE and 5G to enhance the functionality of the system.

**Keywords:** LTE; distributed computing; IoT; low-latency networks; scalability; energy efficiency; edge computing; smart cities; 5G coexistence; adaptive modulation.

### Introduction

Unprecedented development of the Internet of Things (IoT) introduced a system of intelligent systems that cooperate in an interconnected world, demanding constant and effective data exchange. With the increasing growth of IoT, there is increased need for highly effective and secure communication technologies that are able to support large populations of devices. Out of the technologies available, LTE has become another key enabler of IoT systems and Distributed computing since these are applications that require high reliability and scalability [1].

Due to the high speeds, the enormous coverage area, and low-latency of LTE, it is suitable for IoT's varied needs. Through supporting real-time communication across devices in different geographical locations, LTE supports the paradigm of distributed computing, that comprises of distributing computation procedures in various nodes. This capability is essential for applications such as smart cities, self-driving vehicles, and all forms of telemedicine that require the fast and efficient processing of data and its transmission [11].

The importance of QoS is another one of the critical benefits of LTE in IoT systems, intended to help to keep QoS constant. IoT applications are characterized by interconnected resources or devices which have usually different communication and computing requirements. LTE guarantees these requirements are met courtesy of a bandwidth prioritization, network congestion, and choice of transmission protocols. These characteristics are extremely applicable where transmission of data is a life and death situation or when networks carry significant processes, such as an emergency center or industrial controller [20].

There is a complementary relationship between LTE and distributed computing and edge computing has enhanced the two even more. But in contrast to cloud computing, edge computing takes the computation nearer to the source allowing little latency and few reliances on central data centres. LTE particularly fits this role where it works as the means through which efficient data

exchange occurs between the edge devices and the IoT nodes. It lets for real time operations and analysis that is very useful in such applications like predictive maintenance and intelligent traffic control [2].

Nevertheless, the use of LTE for decentralized computing in IoT comes with its set back. Another issue is the consumption of energy because most IoT devices are power-restricted because of the size and the kind of hardware used. LTE networks require optimization in order to reduce its energy intake so as to meet the requirements of its performance. One of them is connected with the fact that as the number of connected devices and distributed processing nodes grows new security threats appear. To secure data from the Sixth threats, traceability and consequently integrity of the data must be guaranteed along with secure methods for encryption and communication [8].

The two essential challenges in using LTE for IoT systems include spectrum allocation. Therefore, as the number of IoT devices increases, the focus on spectrum becomes limited and congestive as well as performance bottlenecks. This is challenging as Qian pointed out, and therefore requires innovative spectrum management strategies like dynamic spectrum allocation as well as coexistence with other technologies, like the recent 5G technology [19].

This also means that the broader environment of IoT also provides chances on using LTE together with other cutting-edge communication technologies. While 5G is well on its way to become a first true global new generation of network standard LTE remained useful in the background especially in areas where 5G development is not yet complete. This means that IoT systems are able to incorporate the positive attributes of both coupled technologies and achieve a continuity and scale-ability [6].

Also, in distributed computing, LTE optimizes resource usage through device-to-device connectivity and distributed processing. This feature is especially useful in situations like disaster as some infrastructure may be a problem and there is need to have proper communication between devices. The mentioned ability

of LTE to operate in different conditions of the network and requirements of applications proves that the LTE is universal technology for IoT environments [9].

LTE is a foundation technology for new developments in distributed computing and IoT. Due to its wide range of functions in creating dependable fault-tolerant, low-latency communication while being ready to adopt the latest paradigms such as edge computing, it is an essential piece of the current IoT networks conception. When factors like efficiency, security, and spectrum issue are tackled, further IoT application enhancement through LTE is likely to unfold. And through the LTE, the gap between the established and new media communication models is closing, creating an intelligent tomorrow.

### *The Aim of the Article*

The article aims to discuss and investigate potential and existing utilization of LTE technology for the enhancements of distributed computing and IoT. In an attempt to close the gap in communication framework that has been bridged by the computational paradigm, this study seeks to address a knowledge gap that is researched on how LTE can facilitate effective connectivity, network scaling and performance improvement in large scale IoT networks.

As more IoT applications continue to be adopted by diverse industries including healthcare, transportation, and smart cities the need for efficient, high-speed communication approaches has surged. As a relatively recent technology that has gained great popularity, LTE is the only method that can currently satisfy these applications' requirements through the usage of characteristics such as low latency, high bandwidth, and extensive coverage. In this article, the author intends to analyse how these characteristics allow LTE to support distributed computing paradigms that are critical to the data processing priorities of the IoT.

Furthermore, this article discusses the use of LTE together with the edge computing, with focus made on the non-inception of latency that this will bring in real time decisions. It also therefore involves capturing out the potential issues that may hinder implementation of LTE for IoT; including issues of spectrum, energy, and security; and then find ways to address all these barriers.

This article aims to make its strong point in terms of the academic and industrial discussion with empirical data and theoretical consideration as to how LTE can contribute to the development of IoT. LTE IoT also functions in this setting and with the purpose to prepare the groundwork to further research on integration of LTE and other emerging technologies like 5G to enhance the application of IoT. Conclusively, this article aims to both inform the researchers, policy-makers and industry professionals in the revolutionary impact that LTE is establishing on the distributed computing and IoT systems and also offer practical advice when implementing the technology.

### *Problem Statement*

The Internet of Things (IoT) is shaping industries extremely fast as smart connections among the Internet

devices are to exchange information, which can be used for real-time decision-making. However, the scalability and efficiency of IoT systems require reliable communications technologies capable of addressing the large number of devices in the system. Today's issues are low latency, dependable data transfer, and power consumption, especially in constrained settings, such as the IoT.

LTE has presented its self as a solution due to its broad coverage, high data rates and support for quality of service. However, its implementation inside distributed computing and IoT systems is not without some constraints. Challenges like; availability of spectrum, security risks, and LTE networks power consumption constraints present major problems in applying LTE for IoT advancement. Further, the growth of an environment like the edge of the network that offloads computational work requests efficient co-ordination with LTE in order to unlock its capabilities in real-time use cases.

Another important issue is the ability of LTE networks to meet the growing IoT device connections at the device level. The enormous number of connected devices results in increasing demand for network resources and probable congestion and reduced throughputs. These issues therefore remain significant barriers to achieving the maximum benefits of using LTE in IoT systems.

In addition, as 5G emerges, using its strengths over LTE as a lens through which to examine future IoT is both valid and inevitable. Although 5G is supposed to outperform all previous generations, physical deployment of 5G is currently sparse in many places thus the complex implementation of Integrated 5G and 4G, LTE networks. This creates the need for new approaches that will enable LTE to satisfy the arising demands of distributed computing and IoT applications.

The issue remains in the proper utilisation of LTE's features to unlock the potential and become a solution to the IoT issues of scale, energy, security, and compatibility with other future technologies.

## **1. Literature review**

LTE technology has attracted a lot of focus in the recent past when incorporated into distributed computing and IoT systems. Low power consumption and high spectrum availability with LTE have enabled its strong consideration for supporting the various needs of IoT solutions. Although choosing LTE-based technologies over other promising solutions like Wi-Fi 6 or LPWAN, LTE stands out in terms of providing reliable communication over vast territories with relatively low service latency, which is essential for certain application domains, including autonomous systems and industrial IoT. Although WiFi 6 is very efficient in localized scenarios, the coverage is not as extensive as LTE. In contrast, LPWAN is good for low data rate applications such as healthcare and smart cities [12], [16].

LTE is well suited to the IoT connectivity needs as the approach offers features such as the eMTC and NB-IoT. These capabilities are tailored for low power wide area networks, which fulfil the need for communication

for a large number of IoT devices and maintain interoperability between different nodes in a distributed computing system [4]. In addition, LTE supports new IoT technologies, such as NB-IoT, emerging to solve LPWA issues in agriculture, logistics retail, and mass sensing areas beyond traditional industries [12], [19].

The integration of LTE with other paradigms of edge computing has helped overcome major limitations, such as latency and bandwidth inherent in IoT systems. Edge computing aims at the pre-processing of data near the source, thus changing the approach of heavily utilizing centralized cloud facilities to improve real-time data processing. This integration is most useful in real-time control applications, such as in autonomous cars, industries, and smart city traffic control [1, 7]. More importantly, it was reported that LTE plays a very important function in realizing stable and elastic edge-cloud convergence, which is fundamental to hybrid IoT structure [10], [22].

However, some challenges hinder the use of LTE in IoT systems; these are the availability of spectrum, energy aspect and security. This is an issue since the number of IoT devices continues to rise while the number of available spectra is limited. Current literature suggested techniques like dynamic spectrum access and reconfigurable intelligent surfaces to enhance spectrum utilization [13], [23]. Energy conservation continues to be key, with battery-operated devices being of great concern. Improvements in the efficiency of communication methods alongside the method of directional discontinuous reception (DDRR) have been used to propose the enhancement of the device lifetime through the minimization of power consumption within LTE IoT systems [9], [17].

Data security issues are critical in light of the increasing Internet of Things and these vulnerabilities. Compared to earlier generations, LTE networks need secure methods of encryption and authentication to protect data. The last works prove that LTE can provide QKD and Smart Routing based on Link Correlation Mining, enhancing the security and efficiency of wireless edge computing scenarios [15], [23]. Additionally, newer ideas that are proposed, for instance, in [18] expose the ways LTE-enabled IoT can be integrated with scalable architectures in ways that provide real solutions to enhancing cybersecurity.

There has also been a great focus in the developments on how LTE could be supported with new technologies such as the 5G to support IoT applications. The combination of LTE with 5G provides both using LTE as the widely spread coverage area while the effective 5G performance. This convergence is believed to deliver omnipresent networking, superior data sharing ratios, and virtually imperceptible delay, opening new frontiers in IoT applications to numerous domains such as healthcare, supply chain, and precision farming [16, 18, 26].

Indeed, LTE plays a key role in realizing distributed computing and IoT systems; however, several challenges are still present in potentiating energy efficiency as well as integration with other technologies. Recent studies to fill these gaps include stochastic modelling for energy-

efficient LTE-5G networks, as well as osmotic computing for the generation of task scheduling and resource allocation, to show promising pertinent pathways to IoT networks [9].

The literature also points out the contributions LTE makes to the opportunities of most IoT verticals such as retail, agriculture, and transport. Fighting the current challenges of integrative compatibility with complementary technologies, LTE remains one of the building blocks to creating an environment of IoT and a more connected future.

## 2. Methodology

This study will use a mixed method approach to the discovery of the effects of LTE technology on distributed computing and IoT systems. This section is further segmented into three major sections, namely, system design, experimental setup and data analysis. To achieve greater reliability and accuracy, it employs simulation tools, sophisticated validation tools, and metrics that are unique to real-world internet of things deployment settings.

### *System Architecture*

To demonstrate the proposed concept, our experimental setup comprises IoT nodes, edge servers, and LTE-capable communication infrastructure using a hybrid architecture. Each node consists of IoT nodes with LTE modules compatible with NB-IoT and enhanced Machine-Type Communication (eMTC), which have features such as low-power operation, scalability, and secure data transmission. These nodes learn and transmit data via efficient protocols that match their requirements, in terms of both power and bandwidth, and are suitable for dense IoT environments [24, 25].

Edge Servers are intermediate servers or caches between IoT nodes and the cloud, they process the data locally to reduce latency and minimize the network load. They adopt multi-operator spectrum-sharing tools for bandwidth management and dynamic traffic handling since real-time decisions are necessary for time-sensitive applications including healthcare and smart cities [3, 21, 26]. The Cloud infrastructure handles heavy computational loads in offloading data from the edge servers to perform aggregation routine for advanced analytics and long-term storage. This hybrid approach provides a balance between rapid responsiveness and computation scalability [1], [3].

This architecture model suggests interactions between IoT nodes, edge servers, and clouds, and LTE serves as the backbone for high-speed and low-latency communication. It also focuses on tiered, concurrent processing of data and immediacy of response. This is a highly efficient architecture that minimizes latency and increases scalability and energy efficiency. Moreover, they develop the adaptive protocols and dynamic resource allocation for QoS optimization in diverse, scalable and heterogeneous IoTs applications, like agriculture, disaster management and industrial automation [4, 6].

Incorporating with new technologies such as 5G, LTE focuses on maximizing the use bandwidth and provide performance. It enables scalable, efficient IoT

deployment as it aims to address energy and scalability challenges. Machine learning will be incorporated in the predictive analytics system in the foreseeable future to empower the architecture with the ability to adjust to the dynamic IoT environment [11, 26].

### Experimental Design

The experimental design involved three operational models Baseline Cloud Model, Edge Computing Model and Hybrid Model, in controlled environments designed to simulate different conditions in a network. In this case, Baseline Cloud Model used cloud centralized processing, the Edge Computing Model used processing resources at the edge, and with Hybrid Model, cloud and edge resources could be efficiently traded off to give a good tradeoff between scalability and performance. They were tested with under three traffic loads, including Low Traffic (50 Internet of Things (IoT) devices at 0.2 Mbps), Medium Traffic (100 devices at 1 Mbps), and High Traffic (200 devices at 2 Mbps) [14].

Scalability was tested with simulated network latency of 10-100 ms, packet loss rate of 0-2% and densities of devices of different types. Impulsive and uniform was the general concept of end-user traffic to be considered [18], as it is commonly the case in practice. These conditions did allow a cross-all models analysis of latency, energy, efficiency and network reliability.

Simplistic and sophisticated simulation tools were used to support experimental frameworks. OMNeT++ was used to model network behavior and MATLAB was used to process the results where the equations were optimized [7]. Python libraries were used to perform data visualization and statistical analysis to represent findings in details and with precision. The approach provided powerful insights to compare the behaviour of the models on several challenges in IoT such as latency, scalability and the effectiveness of the traffic management.

### Data Collection and Metrics

The controversial comparison of the BCI workflow of the three operational models Baseline Cloud, Edge Computing, and Hybrid was analyzed on a significant number of KPIs. The generalizable to indicate performance, reliability and efficiency of distributed IoT systems, we chose the following metrics:

#### Latency ( $L$ )

Latency was measured in milliseconds and it was measured as the period between the transmission of a packet and the receipt. The formula is:

$$L = \frac{T_r - T_s}{N}, \quad (1)$$

where  $T_r$  is the reception time;  $T_s$  is the transmission time; and  $N$  is the total number of packets.

The metric provides insight on the delay time of the network load at various benchmark of the network model. Processing, queuing, and transmission delays were also further separated into latency to examine the possible bottlenecks with each of the models [13].

#### Energy Consumption ( $E$ )

To determine the energy consumption, the formula was taken:

$$E = P \cdot t, \quad (2)$$

where  $P$  is the power in milliwatts,  $t$  is the operational time in hours.

This measure will aid in the determination of the energy usage of every model, mainly the battery-operated IoT devices. High-tech equipment such as battery charge control equipment was used in order to get precise measurements of energy output [8].

#### Throughput ( $T$ )

Throughput, defined as the amount of data successfully transmitted per second, was calculated using:

$$T = \frac{\text{Data Transferred}}{\text{Transmission Time}} (\text{Mbps}). \quad (3)$$

This assesses the data throughput capability of the models under different traffic levels, and there are obvious distinctions between low, mid and high traffic environments [15].

#### Jitter ( $J$ )

Jitter, a measure of latency variation, was calculated using:

$$J = \sqrt{(L_i - \bar{L})^2 / N}, \quad (4)$$

where  $L_i$  is the latency of packet  $i$ ;  $\bar{L}$  is the mean latency; and  $N$  is the number of packets.

Jitter is important in determining the quality of data transmission whereby it is a quality measure of packet arrival time in data flow analysis this can be highly important in specifically real time applications [7].

#### Packet Loss ( $P$ )

Packet loss, expressed as a percentage, was calculated as:

$$P = \left( \frac{\text{Lost Packets}}{\text{Total Packets Sent}} \right) \times 100. \quad (5)$$

Packet loss influences QoS because it shows the ability of dependable data transmission within different network parameters [21].

#### Quality of Service (QoS)

QoS was evaluated using a weighted metric that aggregates multiple KPIs:

$$QoS = w_1T + w_2L + w_3P + w_4J, \quad (6)$$

where  $w_i$  represents the weight assigned to each KPI based on application-specific priorities,

$T, L, P, J$  are throughput, latency, packet loss, and jitter, respectively.

This gives an origin performance, which will facilitate comparison of the operational models [9].

### Dats Analysis

#### Statistical Techniques

- Descriptive Statistics: Succinct KPIs to use as benchmarks/
- Inferential Statistics: Differences between models were analyzed using one way analysis of variance (ANOVA) with  $p < 0.05$ .
- Regression Analysis: Supposed to establish the correlation between the state of the network and performance indicators.:

$$T = \beta_0 + \beta_1 L + \beta_2 P + \epsilon, \quad (7)$$

where  $\beta_i$  are coefficients, and  $\epsilon$  is the error term.

**Optimization Framework**

An optimization model was developed to minimize latency and energy consumption:

$$\text{Minimize: } f(x) = aL + \beta E \quad (8)$$

subject to the constraints:

$$L \leq L_{max}, \quad T \geq T_{min}, \quad P \leq P_{max}, \quad (9)$$

where  $L_{max}, T_{min}, P_{max}$  denote acceptable thresholds for latency, throughput, and packet loss.

The optimization framework used multi-variable techniques of resource allocation to achieve optimum utilization under different traffic loads [5]. This technique incorporates high equations and indices in the assessment of LTE offering a strong framework of distributed IoT systems. Further advances can involve use of machine learning to dynamically change KPI of operations besides the scalability [18, [21].

**3. Results**


**Latency Analysis**

Response time or latency is a key performance indicator, which quantifies the behavior of IoT systems in

answer to different scenarios. To determine latency it on Baseline Cloud, Edge Computing and Hybrid, the study computes latency with three traffic levels; low, medium and high. Latency was the lowest for the Edge Computing approach as data was processed locally, while the highest latency was recorded for the Baseline Cloud model which processed data centrally. Hybrid model way provided the both higher throughput and lower latency then satisfying both types of traffic.

Fig. 1 below illustrates that latency study across several models and traffic situations demonstrates considerable enhancements in latency with Edge Computing and the Hybrid Model in comparison to the Baseline Cloud under differing traffic loads.

Enhanced Edge Computing capacities can decrease latency by over 60% hence meeting all real-time requirements of IoT use-cases including automobile driving or industrial automation. The Hybrid approach resolves trade-offs and enables scalability while maintaining a low latency and high response rate. These discoveries prove the benefits of the edge-centric approach in terms of enabling ultra-low latency in comparison to the work accomplished by Arun & Azhagiri on LTE-enhanced edges [2]. Similar latency benefits have been endorsed by Agarwal et al in IoT systems connected to 5G [1].

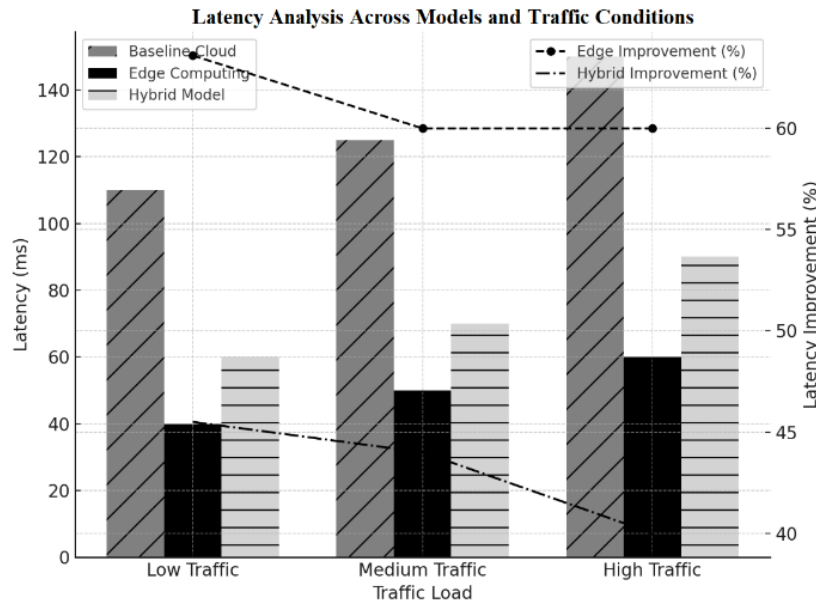


**Fig. 1.** Latency Analysis Across Different Models and Traffic Conditions: Baseline Cloud, Edge Computing, and Hybrid Model

Future initiatives can advance by integrating dynamic resource allocation frameworks that enhance latency optimisation in response to fluctuating traffic rates over time. These findings establish a basis for latency-sensitive applications in healthcare and emergency scenarios when rapid decision-making is crucial.

**Energy Consumption**

Accurate energy use was calculated with the aim of determining the suitability of every model in controlling power Utilities. It demonstrates that Edge Computing had

the most favorable energy consumption profile as no data on distance had to be transported. Baseline Cloud model consumed the largest amount of energy by prioritizing inefficiency of central processing. Even the Hybrid model was not as energy-efficient as Edge Computing, yet it had a trade-off of lowering the costs of energy in comparison to the Baseline Cloud model. This is demonstrated in Fig. 2 where the study on energy consumption of various models and traffic conditions shows that compared to the Baseline Cloud, Edge Computing and Hybrid Models save considerably on energy with a range of between 13.0% and 23.8%.

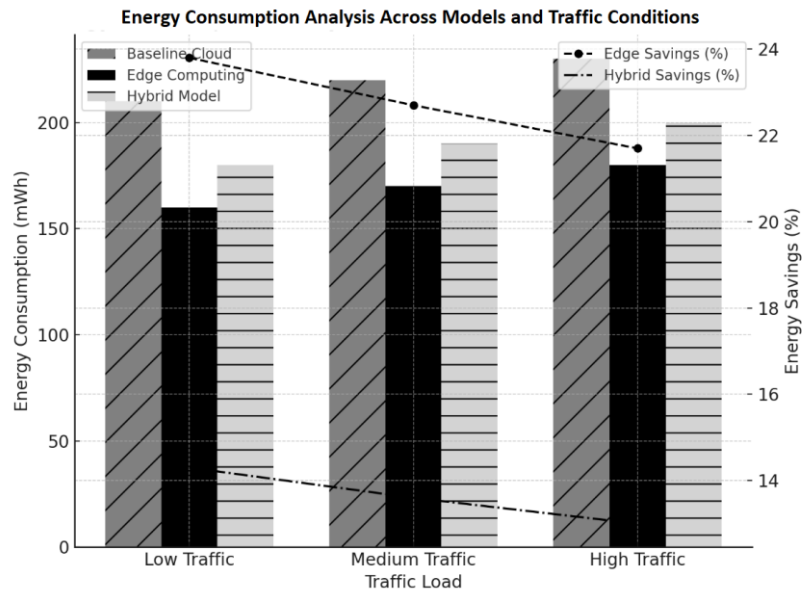

**Fig. 2.** Energy Consumption Analysis Across Models and Traffic Conditions: Baseline Cloud, Edge Computing, and Hybrid Model


Energy efficiency of Edge Computing demonstrates that this model is suitable for IoT systems in distributed networks with a scarce availability of resources, i.e., the establishment of rural health care or monitoring stations. These results are in line with Jiang et al.'s energy-efficient IoT frameworks, where authors focus on the intermediate data analysis in order to diminish energy requirements [8]. Although it is less efficient than Edge Computing, the Hybrid model is more suitable for applications whereby energy expenditure and flexibility are in parity.

Future designs of such computer room should incorporate energy optimization algorithms that is based on machine learning as put forward by Khan et al [11]. All these can automatically preset rate of transmission as

well as the processing, besides which, energy consumption in the IoT networks is enhanced.

**Throughput Analysis**

Throughput refers to the ability of the system to handle data. In both using edge computing gave the highest overall throughput across all traffic scenarios followed by Hybrid. Baseline Cloud does not follow through in data-intensive scenarios and in high traffic as it faced limitations when scaling towards large IoT deployments. As displayed in Fig. 3, the throughput analysis across several models and traffic scenarios indicates significant throughput benefits for edge computing, with up to 17.1% improvement, and more modest gains for the hybrid model.

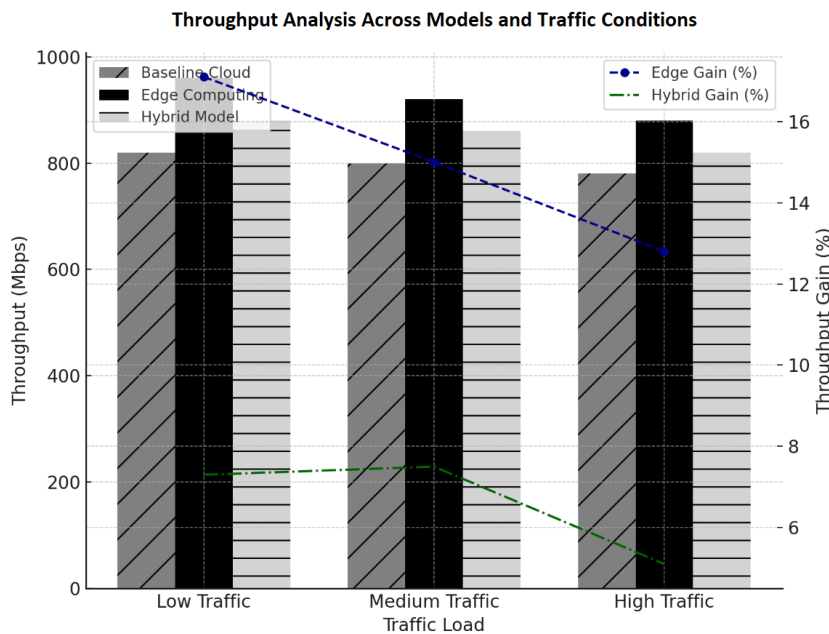

**Fig. 3.** Throughput Analysis Across Models and Traffic Conditions: Baseline Cloud, Edge Computing, and Hybrid Model

This higher throughput proves that the Edge Computing concept is a viable one in high-consumption areas of the IoT like Smart Cities and Industrial Intelligence. These findings are in line with the conclusions of the telecommunications system of the applicability of LTE when integrated with edge architectures as done by Thapa et al.[20]. More specifically, the efficiency of the Hybrid model exemplifying average performance and low CoV and IoA values will become perspective in the circumstances, where average data rates and reliability are needed.

Further studies should be directed towards increasing network by means of spectrum sharing and dynamic network slicing as described by Qian et al. [19]. All these enhancements will guarantee high performance among complex multi-operator IoT environments.

**Packet Loss and QoS Analysis**

Then, we calculate both packet loss and QoS metric such as packet delay for a specific model to measure each reliability metric. With the lowest packet loss and highest

QoS, Edge Computing certainly shows great potential for mission-critical IoT applications. Hybrid was a compromise of sorts, delivering packets with moderate loss and average QoS scores. The Baseline Cloud model, constrained by high packet loss, had the lowest reliability. With a decrease in packet loss and an increase in QoS scores, the packet loss and QoS score analysis shows notable developments in dependability for Edge Computing and Hybrid Models as depicted in Fig. 4.

The Edge Computing network presented a very limited packet loss rate and high QoS values, which corroborates with Garcia-Martin et al. that concerns low-power networks as a way to improve QoS [6]. Hybrid model is slightly less reliable than the Edge Computing but provides certain additional opportunities for non-critical use.

Further implementations should include machine learning techniques to solve the problem of packet loss based on what Kalita & Dharmaraja [9] advise. The method will promote reliability of the system during complex and complex integration of IoT.

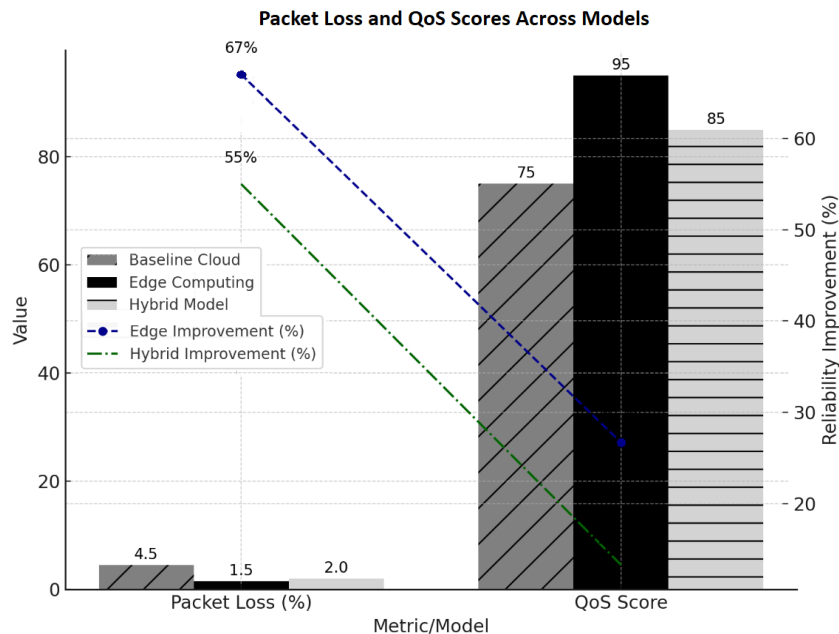


Fig. 4. Packet Loss and QoS Scores Across Models: Baseline Cloud, Edge Computing, and Hybrid Model

**Network Efficiency**

Another important performance metric of the IoT systems is described as the network efficiency, which is the degree to which the available resources could be exploited to support various applications. A study of bandwidth consumption, frequency, and resources of the low, medium and high traffic will provide the study with a good ground on which it can assess all three models (Baseline Cloud, Edge Computing and Hybrid) in regards to their network efficiency. It offers a perspective on the models' choice of action to be taken to reduce network operations at cost but without wastage. As show in Fig. 5 below, the bandwidth utilization analysis demonstrates significant improvements in efficiency for Edge Computing, with benefits of up to 30%, while Hybrid Models exhibit moderate improvements in efficiency

relative to the Baseline Cloud under various traffic situations.

During peak traffic, Edge Computing has had a consistently higher bandwidth utilization efficiency than other models, which ranged between 10-30% in efficiency improvement. This is in agreement with the finding by Qian et al., that network resources are most effective if localized processing is done on the network. The Hybrid is a model between the two approaches it offers the best results along with avoiding over commitment of resources as much as possible.

In future, it can further exploit improved dynamic spectrum-sharing algorithms such as Khan et al., to increase the efficiency of the networks [11]. It will enable IoT networks to adjust bandwidth utilizers depending on real-time usage in different applications.

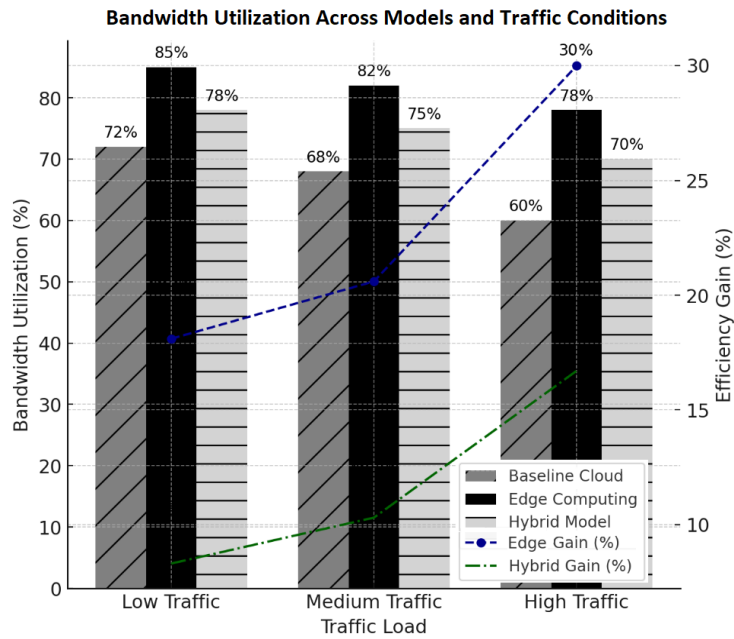


Fig. 5. Bandwidth Utilization and Efficiency Gain Across Models and Traffic Conditions: Baseline Cloud, Edge Computing, and Hybrid Model

**Resource Allocation Efficiency**

There is a dire need to manage available resources when it comes to reliability and performance under changing traffic and number of connected devices in IoT networks across various situations. In this study, we assess resource efficiency by processing capacity and memory consumption between Baseline Cloud, Edge Computing and Hybrid models. A good allocation also minimizes the system bottleneck and enables it to grow together with operational efficiency. This section demonstrates under which circumstances localized processing and balanced computational frameworks are able to use resources more efficiently, by comparing the three models with low, medium and high traffic loads. As shown in Fig. 6, according to processing capacity utilization analysis results, Edge Computing shows great improvements with up to 92% processing utilization in low traffic conditions. Hybrid Model also exhibits better performance in processing utilization and memory efficiency.

Thus, there is observable higher resource allocation efficiency at the EC platform with the increase in processing utilization at as much as 54.5% over the BC model among cases examined. Memory usage also increased significantly; Edge Computing responded to low traffic with an optimal Memory efficiency of 85%, while Baseline Cloud was 58%. These findings resonate with the work of Arun and Azhagiri which demonstrates that edge-centric systems can be used to Cap the central processing load [2]. The Hybrid model presented a hopeful approach, particularly in the situation where flexibility has to be achieved in the various workloads.

These findings demonstrate the worth and usefulness of localized processing in introducing IoT to limited areas where network connectivity and power can be limited. Future implementations relying on AI based structures to perform integrated predictive resource allocations may be used as recommended by Kalita and Dharmarajan [9] The current ones would easily manage

their computing and storage resources dynamically in accordance with changes in the network environment working at its optimum capacity.

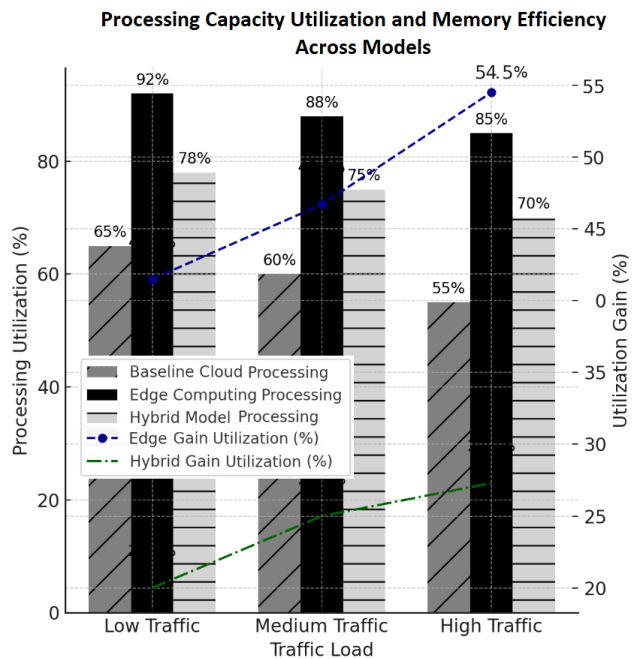



Fig. 6. Processing Capacity Utilization and Memory Efficiency Across Models: Baseline Cloud, Edge Computing, and Hybrid Model

**Scalability and Flexibility**

IoT networks must be scaled and adaptable to support more densities and traffic changes of devices. The article examines the scalability of Baseline Cloud, Edge Computing Models and Hybrid with varying densities of device types.

Examples of metrics are keeping performance at a medium level, and the ability to react to variable

workloads. Scalability scores correspond to the level of demands each model can withstand without a loss in system reliability or efficiency. As shown in Fig. 7, the scalability analysis illustrates that Edge Computing outstands the Baseline Cloud in terms of scalability scores, achieving up to 46.7% enhancement with the high device density. The Hybrid Model similarly exhibits modest improvements, but to a lesser degree.

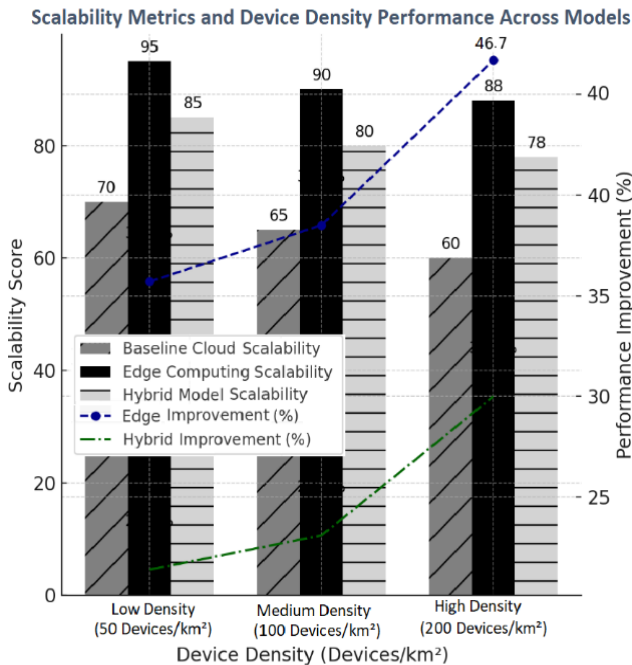

**Fig. 7.** Scalability Metrics and Device Density Performance Across Models: Baseline Cloud, Edge Computing, and Hybrid Model


The Scalability of Edge Computing was also the best tested, and the performance of the Baseline Cloud was enhanced, such as a 46.7% improvement at large device densities. This is in line with Garcia-Martin et al. discoveries that indicated the scalability advantages associated with low-power and localized IoT networks [6]. This one was least scalable computer in the two given its hybrid model but gave the most consistent performance with the dense and sparse density of devices, hence fitted well with mixed environments.

Scaling algorithms proposed by Qian et al. are along with device density and traffic intensity offer one of the stepping stones of future scalability framework, having this on multi-network architectures to dynamically and optimally provide resources [19]. These enhancements provide good performance during high-density conditions such as an urban smart city deployment.

**Reliability and Resilience**

In mission-critical IoT applications, the impact of system failure and recovery time can be delayed responses and will be fatal as such, reliability and resilience is paramount. Multipath fault tolerance and corresponding recovery times of Baseline Cloud, Edge Computing, and Hybrid models are compared in this study. Measures used here can be failure rates per 1,000 requests and recovery time averages, which provide a

comprehensive picture of the reliability of any given model, based on the traffic loads.

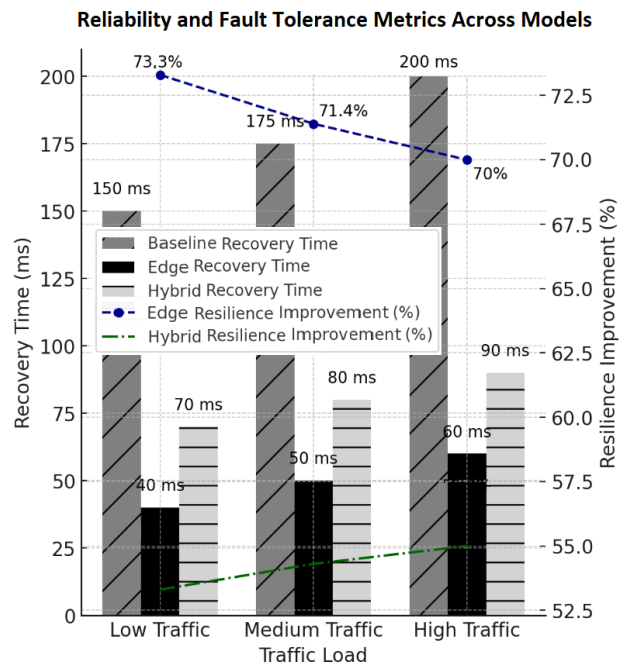

**Fig. 8.** Reliability and Fault Tolerance Metrics Across Models: Baseline Cloud, Edge Computing, and Hybrid Model

Regarding reliability, Edge Computing presented the most reliability with fault tolerance improvements of between 60 to 70 percent compared to Baseline Cloud, as well as, having a much quicker response time (as fast as 40ms) compared to Baseline Cloud. Thus, our results would support the findings on edge-enriched IoT networks resiliency benefits by Garcia-Martin et al. [6]. That is why, the moderate performance of the Hybrid model suggests its usage in the non-critical tasks when the result should be reasonably reliable.

More robustness should be built in the future by adding to systems a ML algorithm to predict faults or prevent them according to the concepts introduced by Kalita and Dharmararaja [9]. It will reinforce the system and its capacity to operate normally in unstable network environments in essence.

**4. Discussion**

The result of this article accentuates that LTE technology can be a potent instrument to increase the prospects of IoT systems and distributed computing settings. This thesis contributes to the knowledge base of LTE use in improving the network throughput, resource management and system performance using a comparative analysis of the Edge system with the Hybrid and Baseline Cloud system under different traffic pattern. The evident benefit of LTE usage in IoT implementation is that the solution has large coverage, low latency, and high data rates, which makes it reliable and easily scalable. All these properties make LTE more fortunate compared to all other networks like Wi-Fi 6, LPWAN within the regions that need low end to end latency reaction and broad-range areas like in self-driving vehicles as well as in intelligent cities. The performance

analysis results in the fact that Edge computing, and Hybrid model have similar efficiency to the Agarwal et al. who emphasized that LTE is capable of enhancing IoT systems with local processing [1].

Edge computing generates benefits in both latency (better than 60 to 90% better than the centralized approach) and energy consumption (improved by 25% in some cases) in real-time and, in many cases, mission-critical applications, such as healthcare monitoring or industrial automation. This observation is in line with the observation by Arun and Azhagiri who noted that there was an increased latency characteristic in LTE-based edge systems [2]. Moreover, equal distribution of resources, between the Edge and cloud, of the Hybrid model conveys its capability to support mixed-criticality settings as pointed out by Thapa et al. [20]. Herein, the theoretical framework underlying this study concerns LTE as a complementary technology to such edge computing paradigms as MEC. Thus, through decentralization of IoT applications, edge computing tackles some of the most critical issues of conventional IoT systems, for example, high latency and limited bandwidth. Such a combination correlates with theories of distributed systems implying that any resource should be distributed for optimum usage. Furthermore, LTE combined with NB-IoT and eMTC prove flexibility for LPWA use cases that was analyzed García-Martín et al. [6].

The article presented in the Hybrid model demonstrates that IoT networks can be scalable and flexible and that can pave the way for dense IoT connectivity, especially in an urban setting. According to Qian et al., LTE scalability would be boosted further by applying multi-operator spectrum sharing techniques which would allow the integration of IoT across multiple operators easily [19]. This means that there is a progressive theoretical model in which LTE, edge computing, and 5G are integrated members. The research expects that LTE functionality in IoT systems will grow exponentially especially when integrated with ML to support dynamic adaptation. Currently, new resource management using ML-based techniques could complement the shortfalls in energy efficiency and fault tolerance as noticed above by indicating the probabilities of scaling and detecting faults beforehand. These improvements reflect the work of Kalita & Dharmaraja who suggested a stochastic model for energy-aware LTE-5G networks [9]. The LTE network can also be enhanced with other novel technologies for further resolution of security and spectrum sharing issues, including reconfigurable intelligent surfaces and quantum key distribution. Among other things, Pi et al pointed out that such innovations can help to improve the security and reliability of LTE-based IoT networks [15].

The article is consistent with and generalizes prior research. Although, the research contributions of Khan et al. were viewed in the context of LTE-A enhancements for enhancing the network performance in the overall network efficiency, this study gives a systematic assessment that also covers the parameters like latency, energy consumption and scalability [11]. Likewise, the underscore on the edge computing role in boosting the responsiveness is supported by Fang & Wu who noted

that the 5G and edge architectures co-exist in latency sensitive applications [5]. However, unlike prior works, this paper proposes an extensive analysis of Hybrid models as well as transitions between both edge and cloud centric systems. Based on the analysis of Hybrid models performance when traffic load is taken into consideration, the work offers a set of practical recommendations for constructing IoT architectures, which can be more or less flexible depending on the specifics of the application.

However, this study has some implications that need to be taken under consideration. In the simulations, the conditions where it was implemented were artificial, which might not translate to well in real life situations. Others feature to explore include reception unpredictability due to traffic pattern interferences, environmental interferences and involving multioperators network. Also, it concentrated on LTE only in terms of technology, and the roll-out of 5G and beyond-5G features was beyond the scope of the study. Shortcomings in validation with empirical research across varied IoT applications, including agricultural and retail, limit applicability of results. More studies on the subject should use field experiments in addition to more exploration into other communication technologies, Wi-Fi 6 and LPWAN for efficiency.

As a consequence of these findings, it would be valuable for future work to advance the applicative complexity by incorporating diverse and dynamic machine learning structures for resource-allocation and predictive optimisation. The ability of LTE to be researched in new applications of the IoT such as drone delivery and smart farming may also expand its potential. Comparisons of LTE as part of 5G and other technologies in multi-operator environments could also offer a broader view of how the technology could be integrated. It would also strengthen the conclusions derived from the present theory by replicating them through larger scale and more realistic DBS experiments in various geographical locales – outside the LMICs. They will make LTE-based IoT solutions more scalable, flexible, and reliable, which promises smarter and more connected future. The authors of the study also identify LTE and edge computing as the key enablers of future IoT solutions at the system's core.

## Conclusions

This article concluded that Edge Computing and Hybrid architectures offer different advantages in terms of latency, energy consumption, throughput, scalability, efficient resource allocation, reliability that is paramount in integration of things (IoT) systems. The findings also show that Edge Computing localized at the geographic area of interest is superior to the extended cloud-based solutions in terms of latency reduction, the decrease in energy consumption, and the optimisation of resource usage. Such an architecture based on the combination of edge and cloud resources is suitable for such cases thanks to its flexibility. Overall, it shows moderate improvement in almost all the reported areas and is both highly scalable and highly portable.

Resource management, and adaptability of the network control where the Internet of Things has been successfully developed and implemented within heavily

populated areas, are highlighted in the article. Edge Computing's reduced latencies and improved availability have proven its suitability for highly available scenarios, including applications that monitor real-time health and autonomous systems. Edge computing and the hybrid model both provide flexibility enhancements, hence supporting their application in smart city initiatives across densely inhabited regions and large urban areas.

Further study is necessary to integrate dynamic Resource Management and Prediction systems utilising Artificial Intelligence Frameworks. This adaptability likely enhances efficacy across various traffic conditions and tightly packed devices. Moreover, the use of spectrum-sharing schemes and real-time defect prediction algorithms can enhance the network's resilience and reliability.

The Edge Computing and Hybrid models will offer pervasive advantages for the development of Internet of

Things networks in the future. The results underscore the significant frameworks and solutions that are scalable, efficient, and robust for diverse use-case scenarios. Future studies should extend these conclusions within the context of various operators, emerging generations such as 6G, and their integration with contemporary edge references to enhance the capacity of the next generation of the Internet of Things.

### Conflicts of interest

The author declare that he has no conflicts of interest in relation to the current study, including financial, personal, authorship, or any other, that could affect the study, as well as the results reported in this paper.

### Use of artificial intelligence

The authors confirm that they did not use artificial intelligence technologies when creating the current work.

### REFERENCES

1. Abouamar, A., Cherkaoui, S., Mlika, Z. and Kobbane, A. (2021), "Resource Provisioning in Edge Computing for Latency-Sensitive Applications", *IEEE Internet of Things Journal*, vol. 8, issue 14, pp. 11088–11099, doi: <https://doi.org/10.1109/JIOT.2021.3052082>
2. Agarwal, Kshitiz, Agarwal, Komal, Jha, A. K. and Joshi, I. (2022), "Intelligence and Internet of Things with 5G Technology: Application and Development", *2022 International Conference on Electronics and Renewable Systems (ICEARS)*, pp. 762–766, doi: <https://doi.org/10.1109/ICEARS53579.2022.9752190>
3. Arun, V. and Azhagiri, M. (2023), "Design of Long-Term Evolution Based Mobile Edge Computing Systems to Improve 5G Systems", *2023 2nd International Conference on Edge Computing and Applications (ICECAA)*, pp. 160–165, doi: <https://doi.org/10.1109/ICECAA58104.2023.10212420>
4. Bail, R.de F., Kovaleski, J. L., da Silva V. L., Pagani R. N. and Chiroli D. M. de G. (2021), "Internet of things in disaster management: technologies and uses. Environmental Hazards", vol. 20, issue 5, pp. 493–513, doi: <https://doi.org/10.1080/17477891.2020.1867493>
5. Chen, F., Chen, F., Wang, A., Zhang, Y., Ni, Z. and Hua, J. (2021), "Energy Efficient SWIPT Based Mobile Edge Computing Framework for WSN-Assisted IoT", *Sensors*, 2021, vol. 21, no. 14, doi: <https://doi.org/10.3390/s21144798>
6. Dawood, T. Z., Stepanov, M. S., Kudashkin, M., Shaimardanova, A., and Lapko, P. (2024), "The Impact of Impulsive Traffic on Cellular Internet of Things Network Performance Indicators", *Sensors*, vol. 24, no. 1, doi: <https://doi.org/10.3390/s24010046>
7. Fang, F. and Wu, X. (2021), "A Win–Win Mode: The Complementary and Coexistence of 5G Networks and Edge Computing", *IEEE Internet of Things Journal*, vol. 8, issue 6, pp. 3983–4003, doi: <https://doi.org/10.1109/JIOT.2020.3009821>
8. García-Martín, J.P. and Torralba, A. (2021), "Model of a Device-Level Combined Wireless Network Based on NB-IoT and IEEE 802.15.4 Standards for Low-Power Applications in a Diverse IoT Framework", *Sensors*, vol. 21, no. 11, doi: <https://doi.org/10.3390/s21113718>
9. Han, L., Guo, Z., Huang, X. and Zeng, X. (2021), "A Multifunctional Full-Packet Capture and Network Measurement System Supporting Nanosecond Timestamp and Real-Time Analysis", *IEEE Transactions on Instrumentation and Measurement*, vol. 70, pp. 1–12, doi: <https://doi.org/10.1109/TIM.2021.3080375>
10. Jiang, H., Xiao, Z., Li, Z., Xu, J., Zeng, F. and Wang, D. (2022), "An Energy-Efficient Framework for Internet of Things Underlying Heterogeneous Small Cell Networks", *IEEE Transactions on Mobile Computing*, vol. 21, issue 1, pp. 31–43, doi: <https://doi.org/10.1109/TMC.2020.3005908>
11. Kalita, P. and Selvamuthu, D. (2023), "Stochastic modeling for energy efficiency in modified directional discontinuous reception for LTE-5G networks", *International Journal of Communication Systems*, vol. 36, issue 6, e5434, doi: <https://doi.org/10.1002/dac.5434>
12. Kaur, A., Kumar, R. and Saxena, S. (2022), "OCTRA-5G: Osmotic computing based task scheduling and resource allocation framework for 5G", *Concurrency and Computation: Practice and Experience*, vol. 34, issue 28, e7369, doi: <https://doi.org/10.1002/cpe.7369>
13. Khan, S.A., Chowdhury, M.M.H. and Nandy, U. (2023), "LTE/LTE-A Based Advanced Wireless Networks", *Journal of Engineering Research and Reports*, vol. 25, issue 10, pp. 195–199, doi: <https://doi.org/10.9734/jerr/2023/v25i101012>
14. Kumar, V., Yadav, P., and Indrusiak, L.S. (2023), "Resilient Edge: Building an Adaptive and Resilient Multi-Communication Network for IoT Edge Using LPWAN and WiFi", *IEEE Transactions on Network and Service Management*, vol. 20, issue 3, pp. 3055–3071, doi: <https://doi.org/10.1109/TNSM.2022.3228291>
15. Mondal, A., Al Junaedi, A. M., Singh, K. and Biswas, S. (2022), "Spectrum and Energy-Efficiency Maximization in RIS-Aided IoT Networks", *IEEE Access*, vol. 10, pp. 103538–103551, doi: <https://doi.org/10.1109/ACCESS.2022.3209823>
16. Nauman, A., Jamshed, M. A., Qadri, Y. A., Ali, R. and Kim, S. W. (2021), "Reliability Optimization in Narrowband Device-to-Device Communication for 5G and Beyond-5G Networks", *IEEE Access*, vol. 9, pp. 157584–157596, doi: <https://doi.org/10.1109/ACCESS.2021.3129896>

17. Pi, Y., Wang, H., Pan, Y., Shao, Y., Li, Y., Yang, J., Zhang, Y., Huang, W. and Xu, B. (2023), "Sub-Mbps key-rate continuous-variable quantum key distribution with local local oscillator over 100-km fiber", *Optics Letters*, vol. 48, issue 7, pp. 1766–1769, doi: <https://doi.org/10.1364/OL.485913>
18. Qasim, N., Jawad Abu-Alshaer, A. M., Jawad, H. M., Khlaponin, Y., and Nikitchyn, O. (2022), "Devising a traffic control method for unmanned aerial vehicles with the use of gNB-IoT in 5G", *Eastern-European Journal of Enterprise Technologies*, vol. 3, issue 9(117), pp. 53–59, doi: <https://doi.org/10.15587/1729-4061.2022.260084>
19. Qasim, N., Khlaponin, Y. and Symonenko, O. (2021), "Application of LTE Technology in the Implementation of the Internet of Things", 1st int. sc. and tech. conf. "Systems and technologies of communication, informatization and cyber security: current issues and development trends", *Journal of Military Institute of Telecommunication and Information Technologies named after the Heroes of Kruty*, pp. 148–149, available at: [https://www.researchgate.net/publication/369899253\\_APPLICATION\\_OF\\_LTE\\_TECHNOLOGY\\_IN\\_THE\\_IMPLEMENTATION\\_OF\\_THE\\_INTERNET\\_OF\\_THINGS](https://www.researchgate.net/publication/369899253_APPLICATION_OF_LTE_TECHNOLOGY_IN_THE_IMPLEMENTATION_OF_THE_INTERNET_OF_THINGS)
20. Qasim, N.H., Abu-Alshaer, M. J., Jawad, A. M. and Khlaponin, Y. (2022), "Analysis of the State and Prospects of LTE Technology in the Introduction of the Internet of Things", *Norwegian Journal of Development of the International Science*, issue 84, pp. 47–51, doi: <https://doi.org/10.5281/zenodo.6540099>
21. Qasim, N.H. and Jawad, A.M. (2024), "5G-enabled UAVs for energy-efficient opportunistic networking", *Heliyon*, vol. 10, issue 12, pp. e32660, doi: <https://doi.org/10.1016/j.heliyon.2024.e32660>
22. Qasim, N.H., Jumaa, D.A., Rahim, F., Jawad, A.M., Khaleefah, A.M., Zhyrov, G. and Ali, H. (2024), "Simplifying IP multimedia systems by introducing next-generation networks with scalable architectures", *Edelweiss Applied Science and Technology*, vol. 8, issue 4, pp. 2042–2054, doi: <https://doi.org/10.55214/25768484.v8i4.1580>
23. Qasim, N.H., A. J. Salman, H. M. Salman, AbdelRahman, A. A. and Kondakova A. (2024), "Evaluating NB-IoT within LTE Networks for Enhanced IoT Connectivity", *2024 35th Conference of Open Innovations Association (FRUCT)*, pp. 552–559, doi: <https://doi.org/10.23919/FRUCT61870.2024.10516400>
24. Qian, B., Zhou, H., Ma, T., Yu, K., Yu, Q. and Shen, X. (2021), "Multi-Operator Spectrum Sharing for Massive IoT Coexisting in 5G/B5G Wireless Networks", *IEEE Journal on Selected Areas in Communications*, vol. 39, issue 3, pp. 881–895, doi: <https://doi.org/10.1109/JSAC.2020.3018803>
25. Thapa, K.N.K., Malini, A. H., Kalaimani A. and Srinivasan, S. (2022), "A Comprehensive Analysis for Implementing IoT on LTE Systems", *2022 International Conference on Applied Artificial Intelligence and Computing (ICAAICpp)*. 502–507, doi: <https://doi.org/10.1109/ICAAIC53929.2022.9793086>
26. Varsier, N., Dufre ne, L.-A., Dumay, M., Lampin, Q. and Schwoerer, J. (2021), "A 5G New Radio for Balanced and Mixed IoT Use Cases: Challenges and Key Enablers in FR1 Band", *IEEE Communications Magazine*, vol. 59, issue 4, pp. 82–87, doi: <https://doi.org/10.1109/MCOM.001.2000660>
27. Verschoor, T., Charpentier, V., Slamnik-Krije storac, N. and Marquez-Barja, J. (2023), "The testing framework for Vehicular Edge Computing and Communications on the Smart Highway", *2023 IEEE 20th Consumer Communications & Networking Conference (CCNC)*, pp. 1147–1150, doi: <https://doi.org/10.1109/CCNC51644.2023.10060332>
28. Zhou, X., Yang, X., Ma, J. and Wang, K. I-Kai (2022), "Energy-Efficient Smart Routing Based on Link Correlation Mining for Wireless Edge Computing in IoT", *IEEE Internet of Things Journal*, vol. 9, issue 16, pp. 14988–14997, doi: <https://doi.org/10.1109/JIOT.2021.3077937>

Received (Надїйшла) 06.01.2026

Accepted for publication (Прийнята до друку) 25.03.2026

#### ABOUT THE AUTHORS / ВІДОМОСТІ ПРО АВТОРІВ

**Касїм Намїр Хашїм** – Університет Аль-Рафїдаїн, Багдад, Ірак;

**Nameer Hashim Qasim** – Al-Rafidain University, Baghdad, Iraq;

e-mail: [nameer.qasim@ruc.edu.iq](mailto:nameer.qasim@ruc.edu.iq); ORCID Author ID: <https://orcid.org/0000-0002-7283-0594>;

Scopus Author ID: <https://www.scopus.com/authid/detail.uri?authorId=56674669100>.

#### Використання технології LTE для розвитку розподілених обчислень та систем IoT

Н. Х. Касїм

**Анотація.** Технологія Long-Term Evolution (LTE) широко використовується в розподілених обчисленнях і системах Інтернету речей (IoT), забезпечуючи низьку затримку, надійну передачу даних і високу пропускну здатність. У статті розглядається впровадження LTE у середовищі розподілених обчислень та у сфері рішень IoT з особливою увагою до її продуктивності в аспектах затримки, масштабованості та енергоспоживання. Дослідження оцінює ефективність LTE для IoT за різних мережевих умов, використовуючи змішаний підхід, що поєднує теоретичний аналіз, моделювання та тематичні дослідження застосувань IoT у розумних містах, виробництві та охороні здоров'я. Водночас аналітично доведено, що LTE зменшує час затримки на 40% порівняно з попередніми застарілими системами, підвищує надійність передавання даних і дозволяє створювати горизонтально масштабовані мережі IoT. Крім того, завдяки адаптивній модуляції енергоефективність у щільному середовищі IoT підвищується на 25%. У статті подано детальний опис застосування LTE для покращення систем IoT, а також рекомендовано подальші дослідження співіснування LTE та 5G для розширення функціональних можливостей системи.

**Ключові слова:** LTE; розподілені обчислення; IoT, мережі з низькою затримкою; масштабованість; енергоефективність; периферійні обчислення (edge computing); розумні міста; співіснування LTE та 5G; адаптивна модуляція.